


DEEP BLUE 3.0

Mono

605W MBB Half-cell Module
JAM78S30 580-605/MR Series

Introduction

Assembled with 11BB PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.

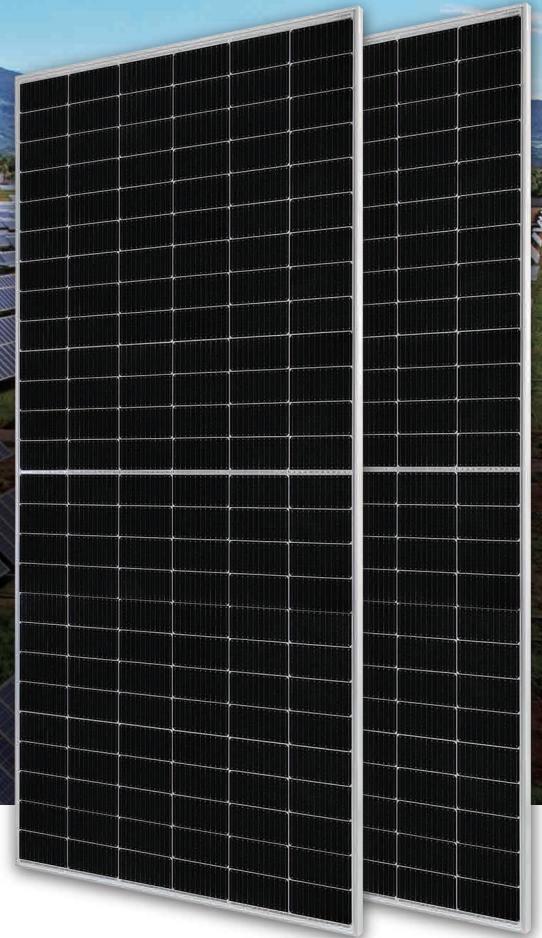

Higher output power



Lower LCOE



Less shading and lower resistive loss




Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

0.55% Annual Degradation Over 25 years

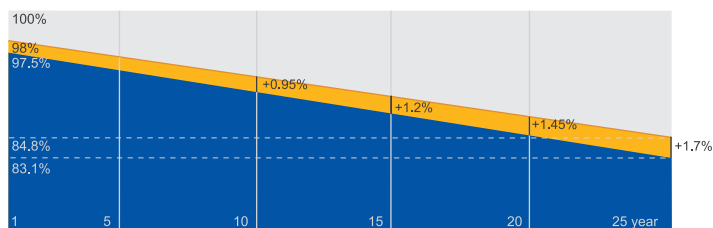


■ New linear power warranty ■ Standard module linear power warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

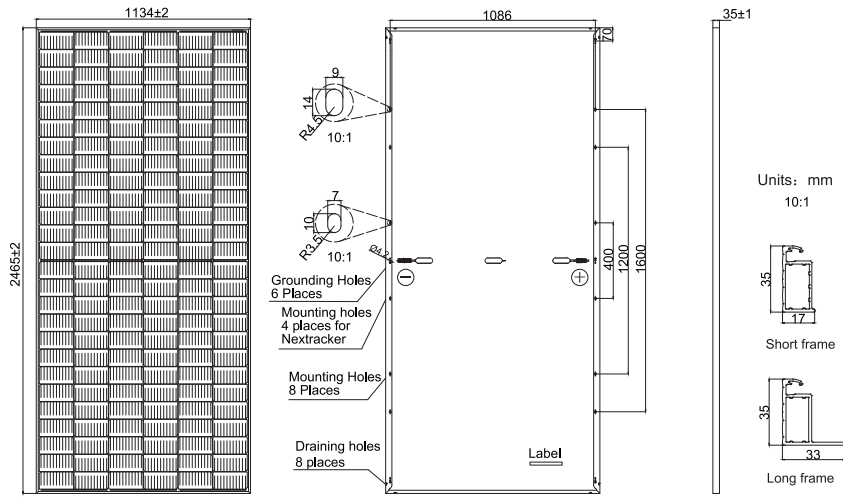

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

| | |
|------------------------------------|--|
| Cell | Mono |
| Weight | 31.1kg±3% |
| Dimensions | 2465±2mm×1134±2mm×35±1mm |
| Cable Cross Section Size | 4mm ² (IEC) , 12 AWG(UL) |
| No. of cells | 156(6×26) |
| Junction Box | IP68, 3 diodes |
| Connector | QC 4.10(1000V) QC 4.10-35(1500V) |
| Cable Length (Including Connector) | Portrait: 300mm(+)/400mm(-); Landscape: 1500mm(+)/1500mm(-) |
| Packaging Configuration | 31pcs/Pallet 496pcs/40HQ Container |

ELECTRICAL PARAMETERS AT STC

| TYPE | JAM78S30 -580/MR | JAM78S30 -585/MR | JAM78S30 -590/MR | JAM78S30 -595/MR | JAM78S30 -600/MR | JAM78S30 -605/MR |
|--|---|---------------------|---------------------|---------------------|---------------------|---------------------|
| Rated Maximum Power(Pmax) [W] | 580 | 585 | 590 | 595 | 600 | 605 |
| Open Circuit Voltage(Voc) [V] | 53.11 | 53.20 | 53.30 | 53.40 | 53.50 | 53.61 |
| Maximum Power Voltage(Vmp) [V] | 44.35 | 44.56 | 44.80 | 45.05 | 45.30 | 45.53 |
| Short Circuit Current(Isc) [A] | 13.84 | 13.88 | 13.93 | 13.98 | 14.03 | 14.08 |
| Maximum Power Current(Imp) [A] | 13.08 | 13.13 | 13.17 | 13.21 | 13.25 | 13.29 |
| Module Efficiency [%] | 20.7 | 20.9 | 21.1 | 21.3 | 21.5 | 21.6 |
| Power Tolerance | 0~+5W | | | | | |
| Temperature Coefficient of Isc(α _{Isc}) | +0.045%/°C | | | | | |
| Temperature Coefficient of Voc(β _{Voc}) | -0.275%/°C | | | | | |
| Temperature Coefficient of Pmax(γ _{Pmp}) | -0.350%/°C | | | | | |
| STC | Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G | | | | | |

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT NOCT

| TYPE | JAM78S30 -580/MR | JAM78S30 -585/MR | JAM78S30 -590/MR | JAM78S30 -595/MR | JAM78S30 -600/MR | JAM78S30 -605/MR |
|--------------------------------|---|---------------------|---------------------|---------------------|---------------------|---------------------|
| Rated Max Power(Pmax) [W] | 438 | 442 | 446 | 450 | 454 | 458 |
| Open Circuit Voltage(Voc) [V] | 50.45 | 50.59 | 50.72 | 50.86 | 51.01 | 51.17 |
| Max Power Voltage(Vmp) [V] | 42.55 | 42.69 | 42.82 | 42.94 | 43.07 | 43.21 |
| Short Circuit Current(Isc) [A] | 11.02 | 11.07 | 11.13 | 11.19 | 11.25 | 11.30 |
| Max Power Current(Imp) [A] | 10.30 | 10.36 | 10.42 | 10.48 | 10.54 | 10.60 |
| NOCT | Irradiance 800W/m ² , ambient temperature 20°C,wind speed 1m/s, AM1.5G | | | | | |


*The mounting installation by 400mm spaced holes is not applicable for JAM78S30 MR.

OPERATING CONDITIONS


| | |
|----------------------------|--------------------------------|
| Maximum System Voltage | 1000V/1500V DC |
| Operating Temperature | -40 °C ~+85 °C |
| Maximum Series Fuse Rating | 25A |
| Maximum Static Load,Front* | 5400Pa(112lb/ft ²) |
| Maximum Static Load,Back* | 2400Pa(50lb/ft ²) |
| NOCT | 45±2 °C |
| Safety Class | Class II |
| Fire Performance | UL Type 1 |

CHARACTERISTICS

Current-Voltage Curve JAM78S30-595/MR

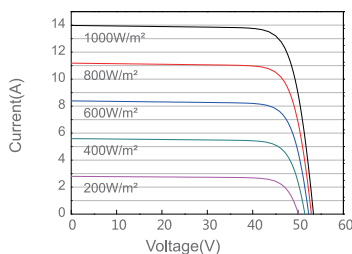

Power-Voltage Curve JAM78S30-595/MR

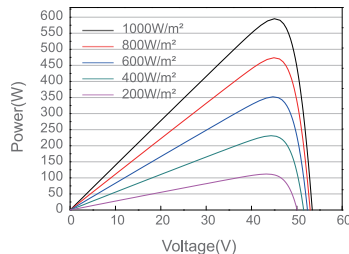

Current-Voltage Curve JAM78S30-595/MR

